


Butterfly Valve - Wafer

Maxaflex Wafer Butterfly Valves are designed for versatility and performance, featuring a ductile iron body, a corrosion-resistant 304 stainless steel disc, and a durable EPDM rubber seal. Rated to 16 bar, these valves ensure reliable flow control in various industrial and water applications. The compact wafer design is perfect for installations where space is limited, and the easy-to-use handle allows for quick and precise operation.



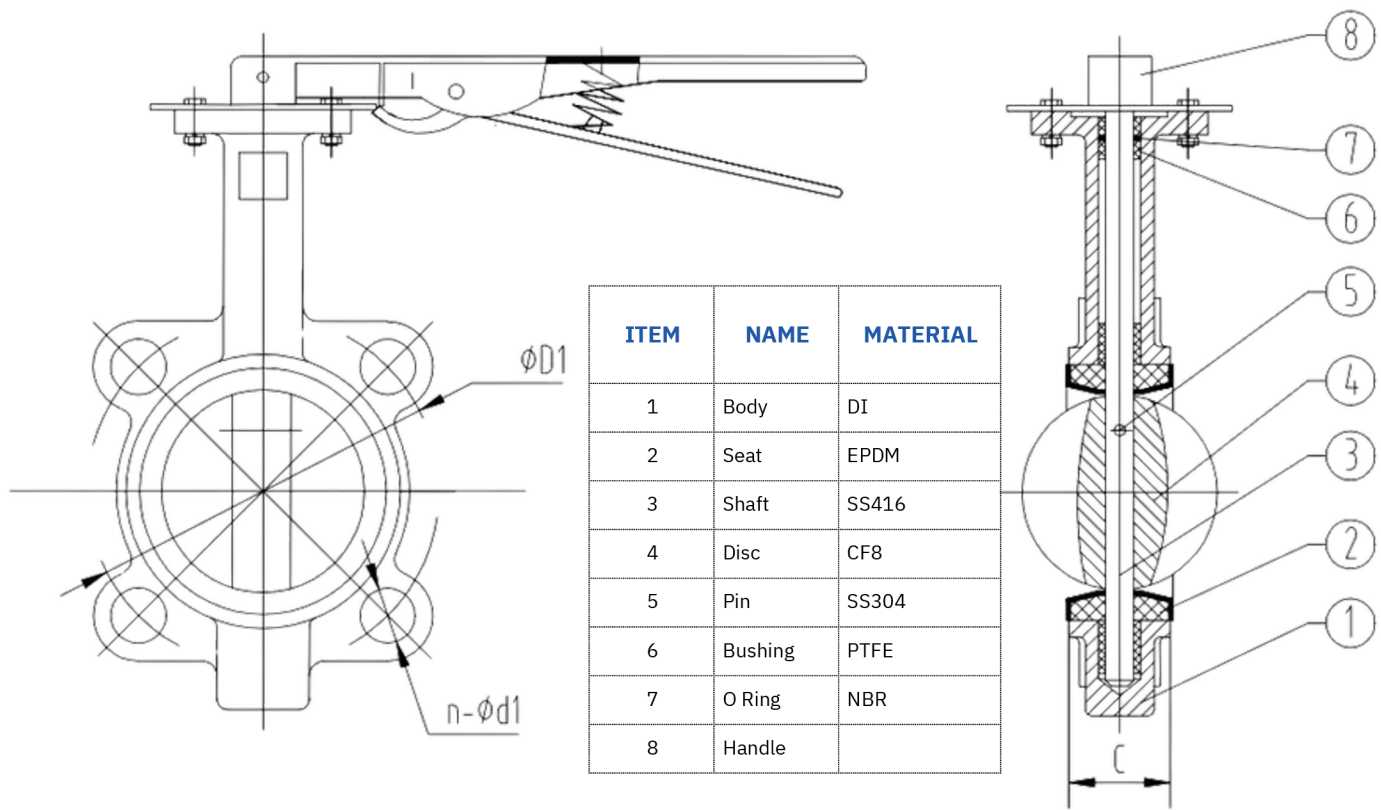

Body: Ductile Iron

Pressure Rating: 16bar

Disc: 304SS

Opening Mechanism: Handle

Rubber: EPDM

SPECIFICATIONS

Part Number	Size		C	PN16		PN10		ANSI 150		AS2129 Table E	
	Inches	DN		D1	n-d1	D1	n-d1	D1	n-d1	D1	n-Ød
BFLY-W-50	2	50	42	125	4-18	125	4-18	120.5	4-19	114	4-18
BFLY-W-65	2.5	65	44.7	145	4-18	145	4-18	139.5	4-19	127	4-18
BFLY-W-80	3	80	45.2	160	4-18	160	4-18	152.5	4-19	146	4-18
BFLY-W-100	4	100	52.1	180	4(8)-18	180	4(8)-18	190.5	4(8)-19	178	4(8)-18
BFLY-W-125	5	125	54.4	210	4(8)-18	210	4(8)-18	216	4(8)-22	210	4(8)-18
BFLY-W-150	6	150	55.8	240	4(8)-23	240	4(8)-23	241.5	4(8)-22	235	4(8)-22
BFLY-W-200	8	200	60.6	295	4(8)-23	295	4(8)-23	295.5	4(8)-22	292	4(8)-22



**CONTACT OUR
SALES TEAM TODAY**
1800 810 670

sales@southernpumping.com.au
www.southernpumping.com.au



**SOUTHERN
PUMPING**

